


PANEL PROFILES



COLOR SELECTION CHART

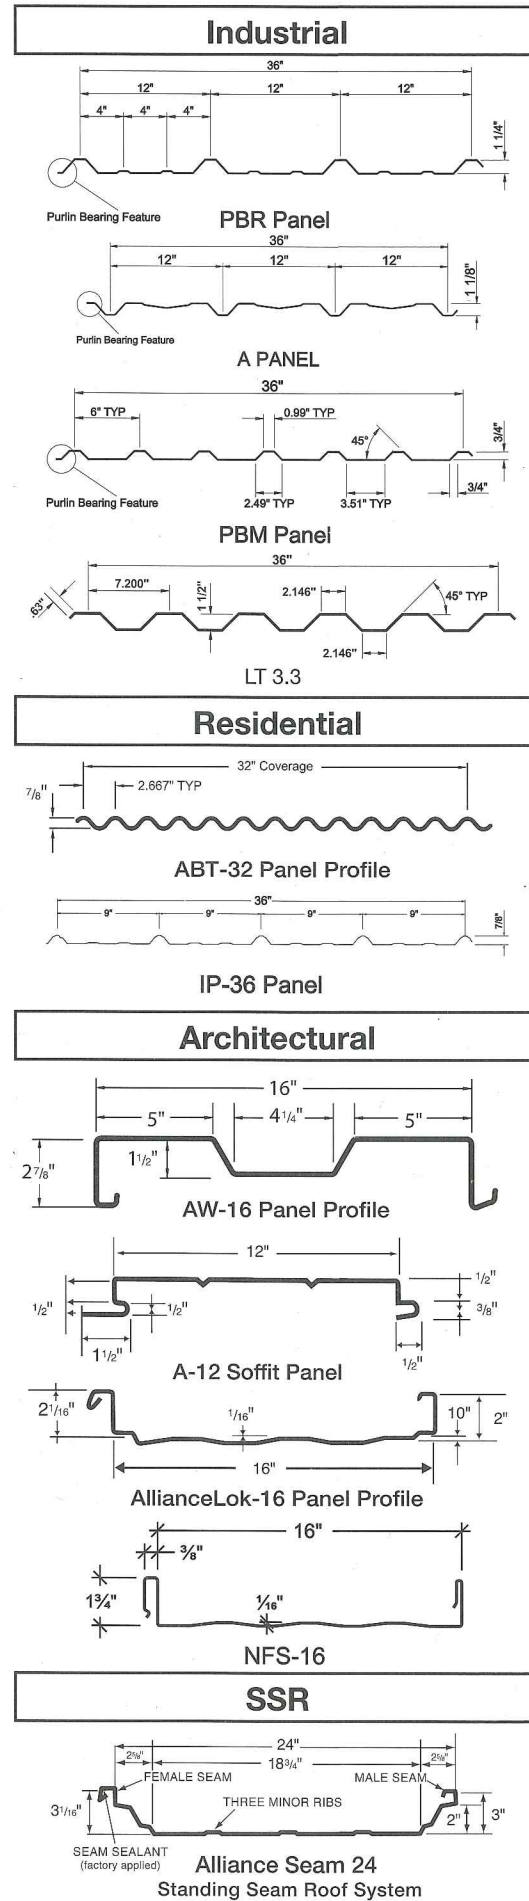

BUILDING STANDARD COLOR SELECTIONS (WeatherX)



- **Oil Canning Is Not A Cause For Rejection.**
- Alliance Recommends Intermediate Beads On All A-12 Panels.
- Alliance Does Not Recommend Lengths Greater Than 20'-0" On A-12 Panels.
- Alliance Recommends Striated Profile on Alliance-Lok 16 and NFS-16.

Warranty Information (See back panel for specific paint system data)

- All Panels have an AZ50 Galvalume substrate with a 25 year rust through perforation warranty.
- WeatherX colors have a 40 year adhesion and a 30 year chalk and fade warranty.
- Fluoropon colors have a 35 year adhesion and a 30 year chalk and fade warranty.
- Acrylume(AZ55) has a 25 year rust through perforation warranty.
- Warranties furnished upon request.

BUILDING PREMIUM COLOR SELECTIONS (Fluropon/Kynar)



PREMIUM COLORS ARE SUPPLIED AT AN ADDITIONAL COST ABOVE THE STANDARD COLORS

valspar

- Solar Reflectance values in accordance with ASTM C-1549
- Thermal emittance values in accordance with ASTM C-1371
- SRI value calculated in accordance to ASTM E-1980

