
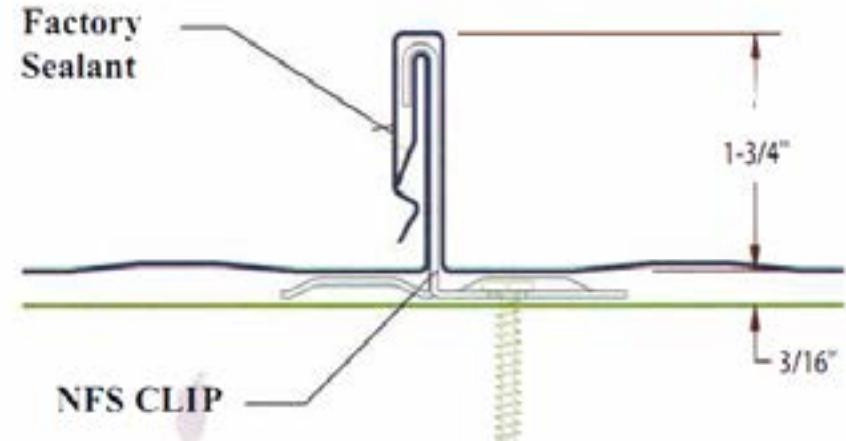


NFS-16 PANEL

Narrow Formed Seam Snaplock Panel

Narrow Formed Seam -16 (NFS-16) panels allow flexibility of design and creativity for the owner and their architect. The panels may be installed over open framing at 4'-0" centers or solid substrates such as wood deck (5/8" minimum) with the UL 90 clips placed at 3'-0" on center. The integral built in locking leg of the panel design does not require any field seaming of any nature. The ease of installation makes this panel an erectors favorite while the architectural appeal makes it an owners dream. NFS-16 makes an excellent roof but, can make any fascia stand out. The panel is available in all ASI colors and in several gauges.

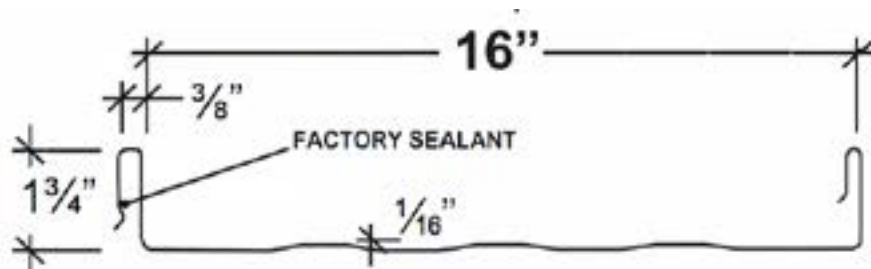

- 16" Wide Panel Coverage
- Attractive Thin Seam Snap-Together Design
- No Mechanical Seaming Required
- Ideal For Challenging Hip And Valley Roof Designs
- Factory-Applied Sealant In The Female Rib
- Weathertightness Warranties Are Available
- Striated Surface For Consistent Aesthetic Performance
- UL 580 Class 90 wind Uplift Rated
- UL 790 One-Hour Fire Resistance Rated Minimum Roof Slope 3:12
- UL 2218 Class 4 Impact Resistant